


Curved chain conveyors J or Z shapes

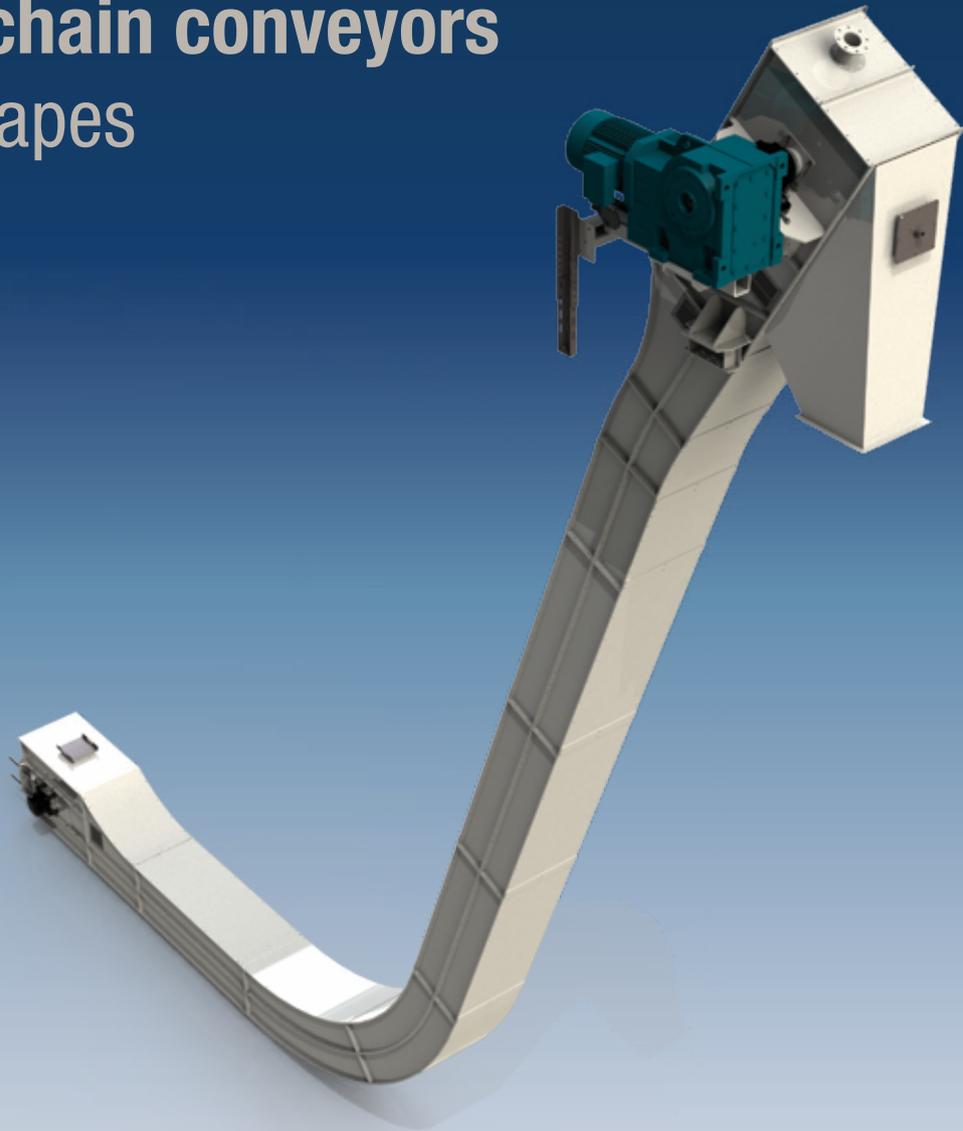

Our range of curved chain conveyors with high inclination is convenient and useful for the industries with high explosion risks.

In risk evaluations studies, the installation of curved chain conveyors is preferred for product elevation to standard systems with bucket elevators horizontally fed by belt, screw, or chain conveyors.

Explosion risks are reduced thanks to the slow conveying speeds of chain conveyors. According to the NFEN1127-1 standard at a speed below 1 m/s no spark is produced by a shock between 2 metallic parts. The conveying speeds are usually adjusted between 0.2 and 0.6 m/s for chain conveyors and between 2 to 3 m/s for bucket elevators.

contact@stolz.fr • www.stolz.fr


Stolz

desmet ballestra




Curved chain conveyors J or Z shapes

Characteristics

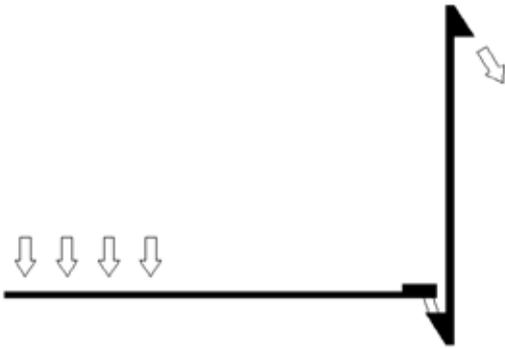


Elevation of product with an horizontal conveyor downstream of a bucket elevator

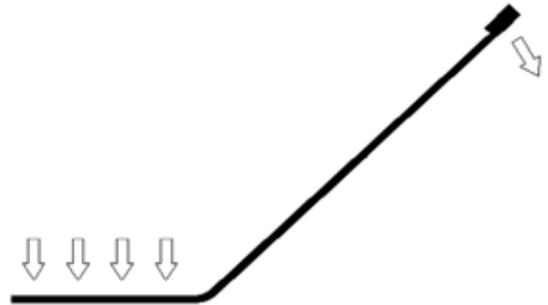


Elevation of product with a curved chain conveyor

Principle of curves



Shape « Z »



Shape « J »

In addition to the technical and legislative aspects, elevators suitable to industries with high explosion risks are costly by reason of their explosion protective systems.

Beside the «Z» curved chain conveyors (the most commonly used), we have also designed the «J» shape conveyors.

One of the advantages to have a single curve instead of 2 is to allow the use of motors with lower power, thus reducing the required power consumption. The upper curve generates significant frictions requiring an increase of motors torque. By removing the upper curve we are also increasing the lifetime of mechanical elements thus subject to less stress.

These advantages will enable our customer to lower their running costs.

Our range has capacities from 20 up to 300 m³/h varying according to inclination.



Curved chain conveyor



Curved chain conveyor head

Stolz

desmet ballestra

contact@stolz.fr • www.stolz.fr